

ADP-71S

ANALOGUE DOME





KEY FEATURES

- Compact design
- 1.3M CMOS SENSOR
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal Synchronization
- 3-axis (pan/tilt/rotation) positioning allows adjustment for optimum Surveillance angles and position



SPECIFICATION	ADP-71S
Camera	
Image Sensor	1/3" 1.3M CMOS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) × 960 (V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON)
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6 mm (2.8mm, 6 mm optional) Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 90°; Rotation: 0 - 355°
Day & Night	Electronic
Horizontal Resolution	900 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 1W
Dimensions	Φ 97.8 x 64.4 mm (φ 3.85" x 2.54")
Weight	300 g (0.66 lbs)

DIMENSIONS (mm)

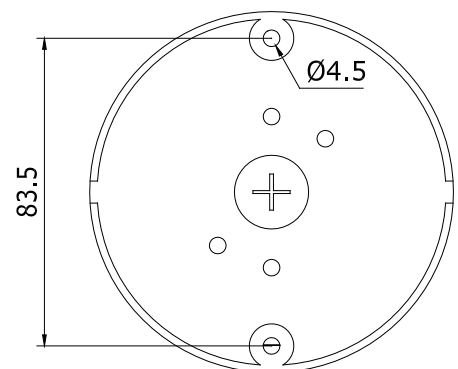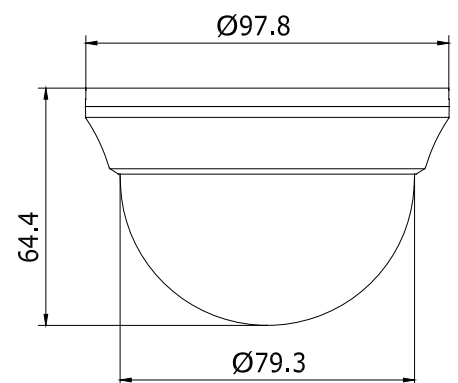

Unit: mm