

HAVR-04MT HAVR-08MT HAVR-16MT

HAVR - TVI/AHD/960H




KEY FEATURES

- Connectable to HD-TV, AHD and analog cameras
- H.264+ compression improves encoding efficiency by up to 50% and reduces data storage costs
- Supports 1080p lite mode enabled to realize the real-time 1080p lite and 720p lite resolution
- HDMI/VGA output at up to 1920x1080p resolution for 4/8 channel and 4K (3840x2160p) resolution for 16 channel
- 4/8/16-ch synchronous playback at up to 1080p resolution
- Smart search for efficient playback



SPECIFICATION	HAVR-04MT	HAVR-08MT	HAVR-16MT
Video/Audio Input			
Video compression	H.264+/H.264		
Analog video input	4-ch	8-ch	16-ch
	BNC interface (1.0Vp-p, 75 Ω), supporting coaxitron connection		
Supported HD TVI input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720P/50Hz, 720p/60Hz		
Supported AHD input	720p/25Hz, 720p/30Hz		
CVBS input	Support		
Audio compression	G.711u		
Audio input/Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
Video/Audio output			
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
Encoding resolution	When 1080p Lite mode not enabled: 1080p(non-real-time)/720p(non-real-time)/VGA/WD1/4CIF/CIF; When 1080p Lite mode enabled: 1080p lite/720p lite/VGA/WD1/4CIF/CIF		
Frame rate	Main stream: 25fps(P)/30fps(N) Sub-stream: CIF/QVGA/QCIF (real time)		
Video bit rate	32 Kbps to 6 Mbps		
Audio output	1-ch, RCA (Linear, 1KΩ)		
Audio bitrate	64 Kbps		
Dual-stream	Support		
Stream type	Video, Video & Audio		
Synchronous playback	4-ch	8-ch	16-ch
Network management			
Remote connections	128		
Network protocols	TCP/IP, PPPoE, DHCP, HIK Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Hard disk			
SATA	1 SATA interface		
Capacity	Up to 6TB capacity		
External interface			
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the audio input)		
Network interface	1; RJ45 10M/100Mbps self-adaptive Ethernet interface	1; RJ45 10M/100/1000Mbps self-adaptive Ethernet interface	
USB port	2 × USB 2.0		
General			
Power supply	12 VDC		
Consumption (without HDD)	≤ 8W	≤ 12W	≤ 20W
Working temperature	-10 °C to +55 °C		
Working humidity	10% to 90%		
Dimensions(W × D × H)	200 × 200 × 45mm		285 × 210 × 45mm
Weight(without hard disks)	≤ 0.8 kg		≤ 1.2 kg

Rear Panel of HAVR/04MT

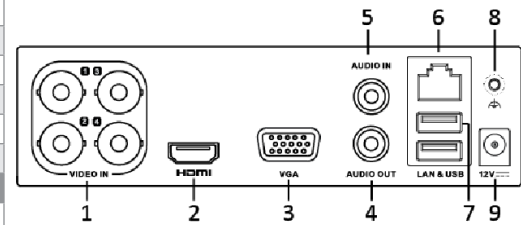

- 1 VIDEO IN
- 2 HDMI Interface
- 3 VGA Interface
- 4 AUDIO OUT, RCA Connector
- 5 AUDIO IN, RCA Connector
- 6 LAN Network Interface
- 7 USB Ports
- 8 GND
- 9 12VDC Power Input