


Item Code: 477LI26-12

Product description: LI 26-12 ACCUMULATORE 12 V 26 Ah




● Outer dimensions (mm)

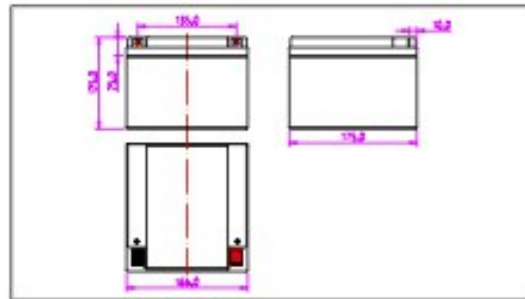

● Specifications

Nominal Voltage		12V
Rated capacity (20 hour rate)		26Ah
Dimensions	Total Height	125 mm (4.92 inches)
	Height	125 mm (4.92 inches)
	Length	166 mm (6.54 inches)
	Width	175 mm (6.89 inches)
Weight Approx		7.8Kg (17.20 lbs)


● Terminal Type (mm)

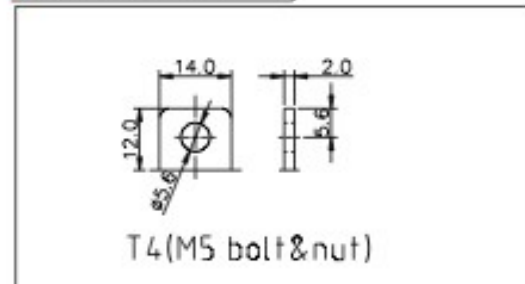

● Characteristics

Capacity 25 °C (77 °F)	20 hour rate (1.30 A)	26.0 AH
	10 hour rate (2.39 A)	23.9 AH
	5 hour rate (4.42 A)	22.1 AH
	1 hour rate (15.60 A)	15.6 AH
1.5 hour discharge to 10.5V		11.1 A
Internal Resistance Full charged Battery at 25 °C (77 °F)		14.3 m Ω
Capacity affected by Temperature (20hour rate)	40 °C (104 °F)	102%
	25 °C (77 °F)	100%
	0 °C (32 °F)	85%
	-15 °C (5 °F)	65%
Self-Discharge at 25 °C (77 °F)	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
	Capacity after 12 month storage	64%
Terminal		T4, T13
Charge (constant Voltage)	Cycle	Initial Charging Current less than 10.4 A Voltage 14.40-14.70V
	Float	Voltage 13.50-13.80V

● Discharge Curves 25 °C (77 °F)

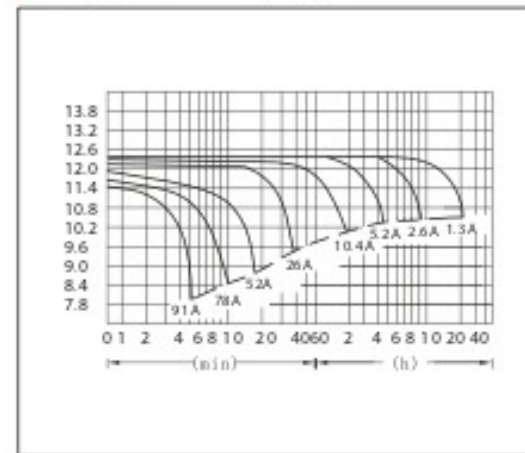

Constant Current (Amp) and Constant Power (Watt) Discharge Table at 25 °C (77 °F)												
Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
9.60V	A	9860	6136	4550	2990	1560	910	670	537	456	301	246
	W	11089	6933	5243	3174	1798	1053	775	622	528	348	285
10.20V	A	8580	5872	4182	2838	1465	873	650	520	447	296	242
	W	10389	6565	4929	3153	1690	1011	753	602	518	342	280
10.50V	A	7811	5486	3900	2752	1417	856	639	494	445	293	239
	W	10082	6270	4713	3120	1640	991	740	572	515	339	277
10.80V	A	7506	5243	3640	2676	1369	834	628	485	423	285	233
	W	8797	6175	4539	3109	1593	971	731	565	492	325	271
11.10V	A	6942	4940	3380	2600	1322	813	596	477	404	277	228
	W	8504	5969	4323	3088	1571	964	710	563	481	314	265



ISO 14001: 2004
Sistema di gestione ambientale



CI ITPI: 2015
100% Made in Italy Certificate



ISO 9001: 2008
Sistema di gestione della qualità



OHSAS 18001: 2007
Sistema di gestione per la salute e sicurezza sul lavoro

LINCE ITALIA S.p.A.

Via Variante di Cancelliera s.n.c., Ariccia (RM) Italia
Tel.: +39 06/09301801 - Fax: +39 06/0930180233

www.lincede.net - info@lincede.net

MD-03.11 Rev. 3 - Pag.: 1 di 1