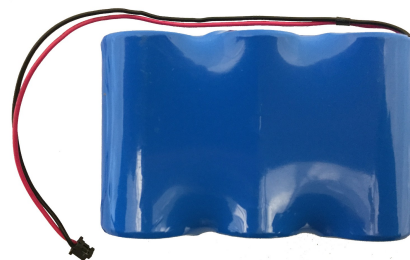







Codice articolo: 001515/00251AA

Descrizione del prodotto: Accumulatore 9 V 12 Ah con connettore

Caratteristiche principali: Pacco batteria 9 V 12 Ah composto da 3 batterie, modello CR34615E, collegate in serie e racchiuse in una guaina termoretraibile. Le singole unità presentano una tensione di esercizio alta e stabile. Tasso annuo di autoscarica di lunga durata (<2% @ +20 °C). Acciaio inossidabile nichelato. Sigillatura ermetica. Conforme allo standard di sicurezza IEC 86-4. Nessuna limitazione per il trasporto.


CARATTERISTICHE TECNICHE

- Capacità/voltaggio nominale (*singola unità CR34615E*): 12 Ah/3,0 V
- Corrente continua massima raccomandata (*singola unità CR34615E*): 3,3 A
- Corrente impulsiva massima (*singola unità CR34615E*): 7 A
- Cavo: nero/rosso AWG 24, lunghezza 200 mm
- Connettore: DF3-2S-2C (Hirose)
- Temperatura di conservazione (*singola unità CR34615E*): max 30 °C
- Intervallo operativo di temperatura (*singola unità CR34615E*): -40 ÷ +70 °C
- Peso (*singola unità CR34615E*): 125 g
- Dimensioni (*max*): 105 x 66 x 37 mm
- Compatibilità: tutte le sirene radio OBLO' della serie GOLD e GOLD Universale

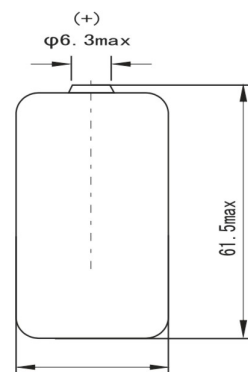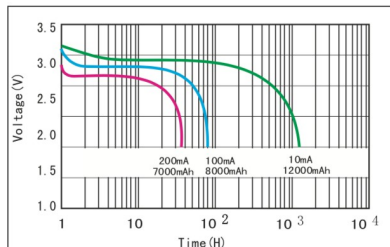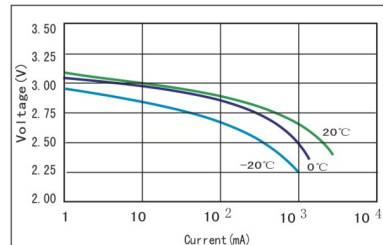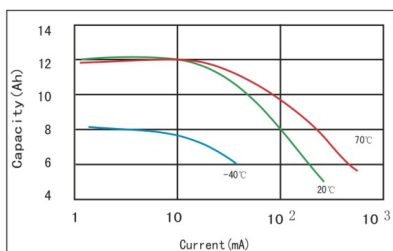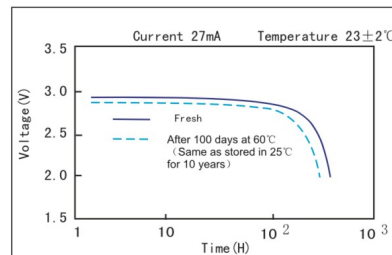
Caratteristiche di scarica a 25 °C

Curva tensione vs corrente e temperatura

Curva capacità vs corrente e temperatura

Caratteristiche di conservazione


Item Code: 001515/00251AA


Product description: 9 V 12 Ah battery with connector

Main features: Battery pack made by 3 batteries, model CR34615E, connected in series and enclosed in a shrinkable sheath. The single units present high and stable operating voltage. Long shelf life annual self-discharge rate (<2% @ +20 °C). Stainless steel nikel plated. Hermetic sealing. Compliant with IEC 86-4 safety standard. Non-restricted for transport.




SPECIFICATIONS


- Nominal capacity/voltage (*single CR34615E unit*): 12 Ah/3.0 V
- Maximum recommended continuous current (*single CR34615E unit*): 3.3 A
- Maximum pulse current (*single CR34615E unit*): 7 A
- Cable: black/red AWG 24, length 200 mm
- Connector: DF3-2S-2C (Hirose)
- Storage (*single CR34615E unit*): max 30 °C
- Operating temperature range (*single CR34615E unit*): -40 ÷ +70 °C
- Weight (*single CR34615E unit*): 125 g
- Dimensions (*max*): 105 x 66 x 37 mm
- Compatibility: all wireless OBLO' sirens GOLD and Universal GOLD Series

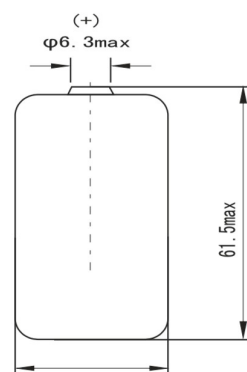


Discharge characteristics at 25 °C

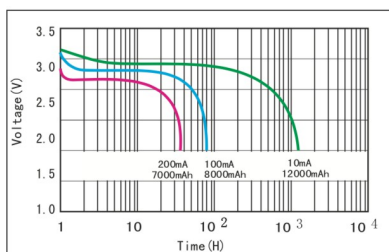


Voltage vs Current & Temperature Curve

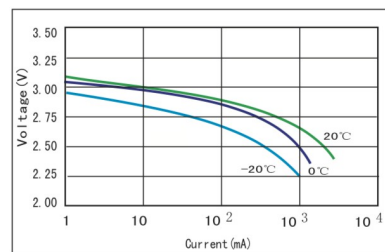

Capacity vs Current & Temperature Curve

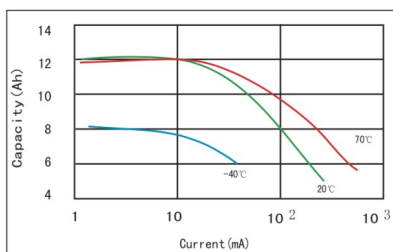

Storage characteristics

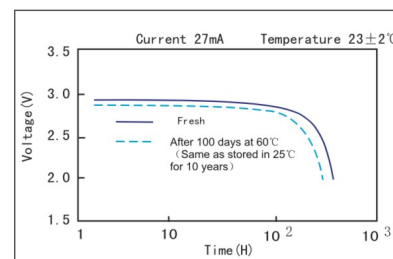

BS OHSAS 18001:2007
Occupational Health and
Safety Management System

ISO 14001:2015
Environmental Management
System



ISO 9001:2015
Quality Management
System

CI ITP: 2015
100% Made in Italy
Certificate



LINCE ITALIA S.p.A.

Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
 Tel.: +39 06 92928252 - Fax: +39 06 92942586
www.lince.net - info@lince.net
MD-03.11 Rev. 6 - Pag.: 2 di 2