

SACH-0623 (outdoor)

SABH-0623 (indoor)

ANALOGUE PTZ



KEY FEATURES


- 1/4" Sony CCD
- 540TVL Horizontal resolution
- 23X Optical Zoom
- True Day/Night, 3D DNR, Digital WDR
- 3D intelligent positioning



SPECIFICATION	SACH-0623 (outdoor)	SABH-0623 (indoor)
Camera		
Image Sensor	1/4" Sony CCD	
Effective Pixel	PAL: 752(H)×582(V), NTSC: 768(H)×494(V)	
Horizontal Resolution	Color: 540 TVL, B/W: 600 TVL	
Min. illumination	Color: 0.1 Lux@ F1.6,AGC on), B/W: 0.01 Lux@(F1.6,AGC on)	
White Balance	Auto / Manual / ATW	
AGC	Auto / Manual	
S / N Ratio	≥ 50dB	
Digital Noise Reduction	3D DNR	
Wide Dynamic Range	Digital WDR	
Shutter Speed	PAL: 1/50 ~1/10,000s , NTSC: 1/60 ~1/10,000s	
Day & Night	IR Cut Filter	
Digital Zoom	16x	
Privacy Mask	Up to 8 zones, maximum 8 zones on a same image, multiple colors and mosaics optional	
Focus Model	Auto / Semiautomatic / Manual	
Lens		
Focal Length	3.84 ~88.32mm, 23X	
Zoom Speed	Approx 3.0s(Optical Wide-Tele)	
Angle of View	50.2 ~2.44degree(Wide-Tele)	
Min. Working Distance	10 ~1500mm (Wide-Tele)	
Aperture Range	F1.6 ~F4.5	
Pan and Tilt		
Pan / Tilt Range	Pan: 360° endless; Tilt: -5°~90° (Auto Flip)	
Pan / Tilt Speed	Pan Manual Speed: 0.1° ~250°/s, Pan Preset Speed: 300°/s Tilt Manual Speed: 0.1° ~150°/s, Tilt Preset Speed: 200°/s	
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples	
Number of Preset	255	
Patrol	8 patrols, up to 32 presets per patrol	
Pattern	4 patterns, with the total recording time not less than 10 minutes	
Power-off Memory	Support	
Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan	
PTZ Position Display	On / Off	
Compass	Support , the north can be set	
Scheduled Task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan / Day / Night	
Infrared		
IR Range	Up to 100m	
IR irradiation angle	Automatically adjusted, depending on the zoom ratio	
Input/ Output		
Video Output	1.0 V[p-p] / 75Ω, PAL / NTSC composite, BNC	
General		
RS-485 Protocols	Pelco-D, Pelco P, Self-adaptive	
Power	24 VAC; Outdoor dome: Max. 20W / 12W (Heater On / Off); Indoor dome: Max.12W	
Working Temperature	Outdoor dome: -30°C ~ 65°C(-22°F ~ 149°F); Indoor dome: -10°C~50°C(14°F ~ 122°F)	
Humidity	90% or less	
Protection Level	IP66 standard; TVS 4,000V lightning protection, surge protection and voltage transient protection	
Dimensions	Φ220 × 305mm (Φ8.66" × 12.00")(Outdoor) Φ183.4 × 243mm(Φ7.22" × 9.56") (Ceiling) Φ245 × 236mm(Φ9.65" × 9.29") (In-ceiling)	
Weight (approx.)	5Kg (11.02lbs)	



DIMENSIONS (mm)

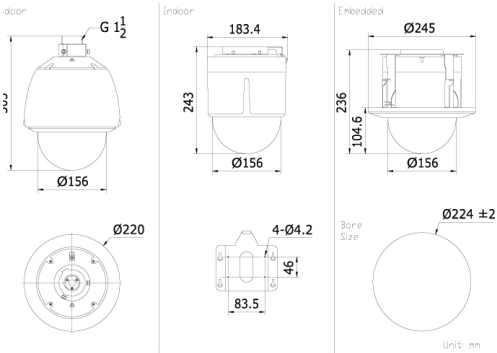

ACCESSORIES

