

INVR-04P112H1-AT



Key Features

- Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth

Smart Function

- | 1-ch video analysis for human and vehicle recognition to reduce false alarm
- | 1-ch facial recognition for video stream, or 2-ch facial recognition for face picture
- | Smart search for the selected area in the video, and smart playback to improve the playback efficiency

Professional and Reliable

- | H.265+ compression effectively reduces the storage space by up to 75%
- | Adopt stream over TLS encryption technology which provides more secure stream transmission service

HD Video Output

- | Provide simultaneous HDMI and VGA outputs
- | HDMI Video output at up to 4K resolution

Storage and Playback

- | Up to 1 SATA interfaces for HDD connection (up to 10 TB)
- | 4-ch synchronous playback

Network & Ethernet Access

- | 1 self-adaptive 10/100 Mbps Ethernet interfaces
- | CTR-MAZi for easy network management

Intelligent Analytics	
AI by Device	Facial recognition, perimeter protection, motion detection 2.0
AI by Camera	Facial recognition, perimeter protection, throwing objects from building, motion detection 2.0, ANPR, VCA
Facial recognition	
Face Attributes	N/A
Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
Face Picture Library	Up to 16 face picture libraries, with up to 5,000 face pictures in total (each picture ≤ 1 MB, total capacity ≤ 73 MB)
Facial Detection and Analytics Performance	1-ch, 4 MP
Face picture comparison (Captured from Camera)	2-ch
Motion Detection 2.0	
By Device	All channels, 4 MP (when enhanced SVC mode is enabled, up to 8 MP) video analysis for human and vehicle recognition to reduce false alarm
By Camera	All channels
Perimeter Protection	
By Device	1-ch, 4 MP (HD network camera, H.264/H.265) video analysis for human and vehicle recognition to reduce false alarm
By Camera	All channels
Video/Audio input	
IP video input	4-ch
Incoming bandwidth	40 Mbps
Outgoing bandwidth	80 Mbps
HDMI output	1-ch, 4K (3840 x 2160)/30 Hz, 2K (2560 x 1440)/60 Hz, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz
VGA output	1-ch, 1920 x 1080/60 Hz, 1600 x 1200/60 Hz, 1280 x 1024/60 Hz, 1280 x 720/60 Hz
Video output mode	HDMI1/VGA simultaneous output as default, HDMI1/VGA can be set to independent output
CVBS output	N/A
Audio output	1-ch, RCA (Linear, 1 kΩ)
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 kΩ, using the audio input)
Decoding	
Decoding format	H.265+/H.265/H.264+/H.264
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/ QCIF
Synchronous playback	4-ch

Decoding Capability	AI on: 1-ch @12 MP (30 fps)/1-ch @8 MP (30 fps)/3-ch @4 MP (30 fps)/6-ch @1080p (30 fps) AI off: 1-ch @12 MP (30 fps)/2-ch @8 MP (30 fps)/4-ch @4 MP (30 fps)/8-ch @1080p (30 fps)
Stream type	Video, Video & Audio
Audio compression	G.711ulaw/G.711alaw/G.722/G.726/AAC

Network

Remote connection	128
API	ONVIF (profile S/G); SDK; ISAPI
Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
Network protocols	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
Network interface	1 RJ-45 10/100 Mbps self-adaptive Ethernet interface

PoE

Interface	4, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 50 W
Standard	IEEE 802.3af/at

Auxiliary interface


SATA	1 SATA interface
Capacity	Up to 10 TB capacity for each HDD
Alarm in/out	N/A (4/1 is optional)
USB interface	<i>Front panel:</i> 1 × USB 2.0; <i>Rear panel:</i> 1 × USB 2.0

General


GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
Power supply	12 Vdc, 1.5 A
Consumption (without hard disk)	≤ 10 W
Working temperature	-10 °C ÷ +55 °C (+14 ÷ +131° F)
Working humidity	10% ÷ 90%
Dimensions (W × D × H)	320 × 240 × 48 mm (12.6"× 9.4" × 1.9")
Weight (without hard disk)	≤ 1 kg (2.2 lb)

Certification

CE	EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017
Obtained Certification	CE, CB, KC, Reach, WEEE, RCM, UKCA, LOA

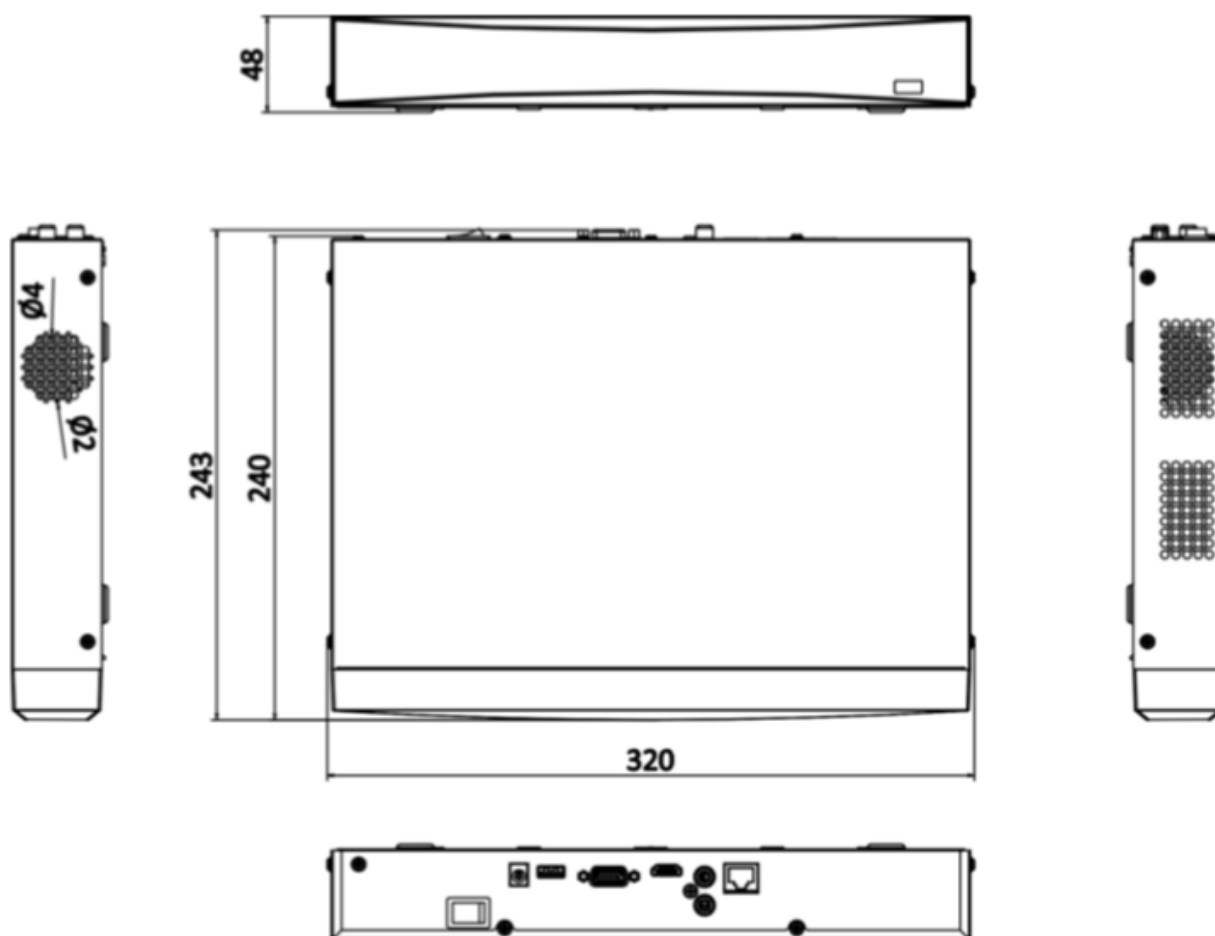

scale/1:1;Unit/mm

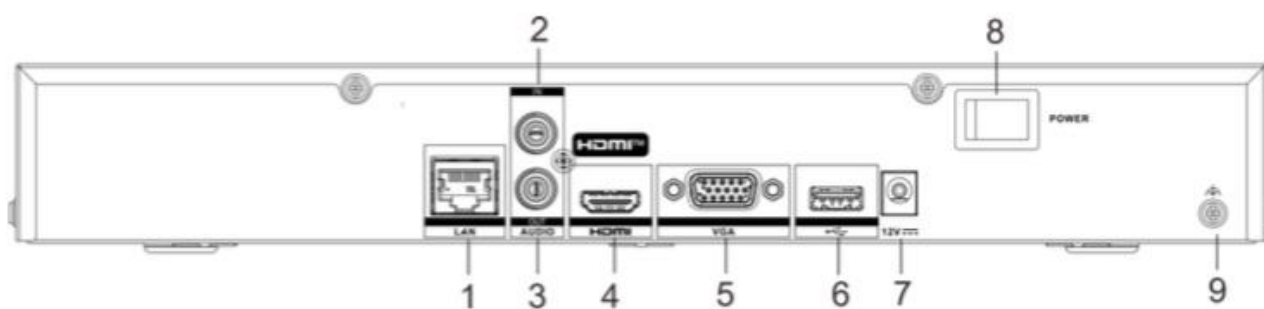

No.	Description	No.	Description
1	LAN network interface	7	Power supply
2	AUDIO IN	8	Power switch
3	AUDIO OUT	9	GND
4	HDMI interface	10	ALARM IN
5	VGA interface	11	ALARM OUT
6	USB interface		