

INVR-16AL2/A

NVR




KEY FEATURES


- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 16-ch network cameras can be connected with 100M incoming bandwidth
- 2 SATA interface
- Support network detection, including network delay, packet loss, etc.
- Alarm: 4in/1out



SPECIFICATION	INVR-16AL2/A
Video/audio input	
IP video input	16-ch
Two-way audio input:	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	100Mbps
Outgoing bandwidth	80Mbps
Remote connection	128
Video/Audio output	
Recording Resolution:	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF
Frame rate	Main stream: 50 fps
	Sub-stream: 50 fps
HDMI/VGA output	1-ch, resolution: 1920 x 1080P /60Hz, 1600 x 1200 /60Hz, 1280 x 1024 /60Hz, 1280 x 720 /60Hz, 1024 x 768 /60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Live view/Playback res.	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-ch@4CIF / 12-ch@720P / 6-ch@1080P
Hard disk	
SATA	2 SATA interface for 2 HDDs
Capacity	Up to 4TB
External interface	
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
USB interface	1 x USB 2.0 and 1 x USB 3.0
Alarm in/out	4 / 1
General	
Power Supply	12V DC
Consumption(without hard disk)	≤ 10W
Working Temperature	-10 °C ~ +55 °C
Working Humidity	10% ~ 90%
Chassis	380 chassis
Dimension	380 × 290 × 48mm
Weight(without HDD)	≤ 1 Kg

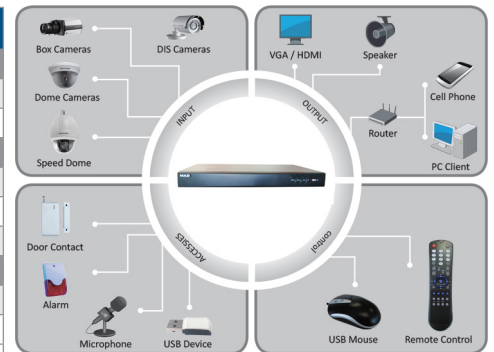

REAR PANEL



1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Alarm I/O