

IWN-43MR

IP BULLET IR




KEY FEATURES

- High performance OV CMOS, 4M resolution
- Audio, hardware reset, **waterproof RJ45**
- H.264 and H.265, dual-stream
- Max resolution:2592*1520
- Onvif and P2P supported
- dWDR, IR Cut Filter, IP66
- 5pcs IR Array up to 45 meter
- 2.8-12mm Auto Focus lens



SPECIFICATION	IWN-43MR
Sensor	1/3" OV CMOS
Min Illumination	Color 0.6Lux@F1.2, white/black 0.08Lux@F1.2
WDR Range	dWDR Range >80db
Video processing	H264, Baseline/Main Profile/High Profile code;H.265 Main Profile code,MJPEG code,dual-stream,support CBR/VBR code rate,32~16M k bit/S adjustable,1-30fps adjustable
Main stream	2592*1520, 1-15 fps / 2048*1520, 1-25(30)fps (default) 1280*1080, 1-25(30)fps / 1280*720, 1-25(30)fps
Sub stream	720*576,1-25(30)fps / 640*480,1-25(30)fps 640*352,1-25(30)fps / 320*240,1-25(30)fps
Audio interface	Support 1 channel linear audio input, 1channel audio output
Audio processing	G.711 coding Standard,Support bothway Voice intercom function,support the synchronization of audio and video
Network Port	1 RJ45 ethernet network port, 10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
IR linkage	support
Reset interface	support
Operation function	Support Web setting,OSD,real-time video transmission,support motive detection and IO alarm linkage for front end shortage/Capture,Support Central remind and image linkage after motion detection and IO alarm linkage,support MJPEG capture,Support unit clint-side remote management software,provide complete SDK
Standard protocol	Onvif 2.4
Mobile monitor	Support P2P, (IOS, Android)
Power supply	DC10.8V~13.2V, PoE 650mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Series Distance	Max. 45 Meter with 5pcs IR Array
Lens	2.8-12mm Auto focus Lens
Camera size	294.5(L)x92.6(H)x91.7(W)mm

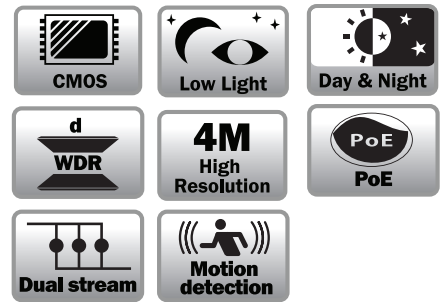

DIMENSIONS

