

ER17335M

3.6V 1700mAh

Primary lithium batteries

3.6V Primary lithium-thionyl chloride
(Li-SOCl₂) high power type
flat A-size spiral cell

Cell size references (A)

Electrical characteristics

(typical values relative to cells stored for one year or less at +30°C max.)

Nominal capacity **1.7Ah**

(at 4mA +20°C 2.0V cut off. The capacity restored by the cell varies according to current drain, temperature and cut off).

Open circuit voltage (at +20°C) **3.66V**

Nominal voltage (at 1mA +20°C) **3.6V**

Max. Continuous current **300mA**

Max. Pulse current **1000mA**

Pulse capability: Typically up to 1000 mA (1000 mA/0.1 second pulses, drained every 2 mn at +20°C from undischarged cells with 10 µA base current, yield voltage readings above 3.0V. The readings may vary according to the pulse characteristics, the temperature, and the cell's previous history.

Fitting the cell with a capacitor may be recommended in severe conditions.

Storage (recommended) **+30°C (+86° F) max**
(for more severe conditions)

Operating temperature range **-55°C/+85°C**

(Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses) **(-67° F/+185° F)**

Physical characteristics

Diameter(max) **17.5mm**


Height(max) **33.5mm**

Typical weight **20.0g**

Available termination suffix radial tabs, radial pins, axial leads, flying leads
(T/AX/P/PT)

Key Features

- Stainless steel container
- High and stable operating voltage
- Superior discharge rate
(less than 1% after 1 year of storage at +20°C)
- Hermetic glass-to-metal sealing
- Compliant with IEC 86-4 safety standard

 Underwriters laboratories(UL)
Component Recognition
(File Number MH46685)


Main applications

- AMR utility meters
- Memory back-up
- Automotive devices
- Deep hole drilling
- RFID devices
- Electronic toll tags
- GPS emergency locators
- Animal tracking
- Asset/container tracking
- Vehicle tracking
- House arrest systems
- Medical devices
- Wireless security(PIR)
- Oceanographic buoys
- Military electronics
- Industrial instruments


ER17335M

3.6V 1700mAh


■ Discharge characteristics at 23±2°C

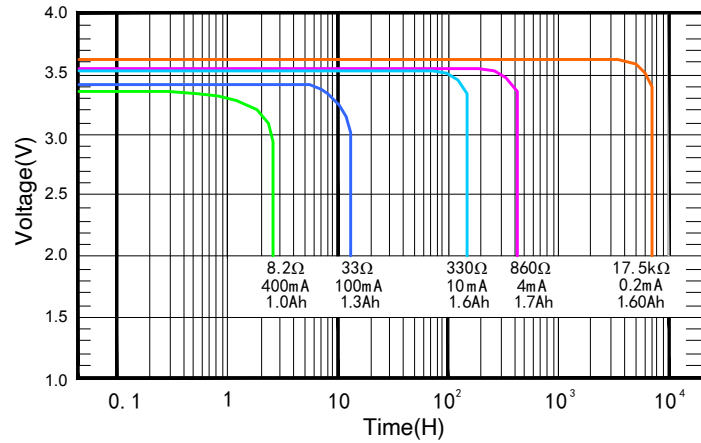

Unit : mm

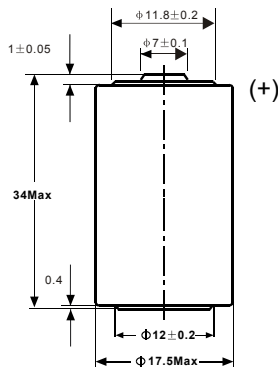

■ Capacity VS. Current

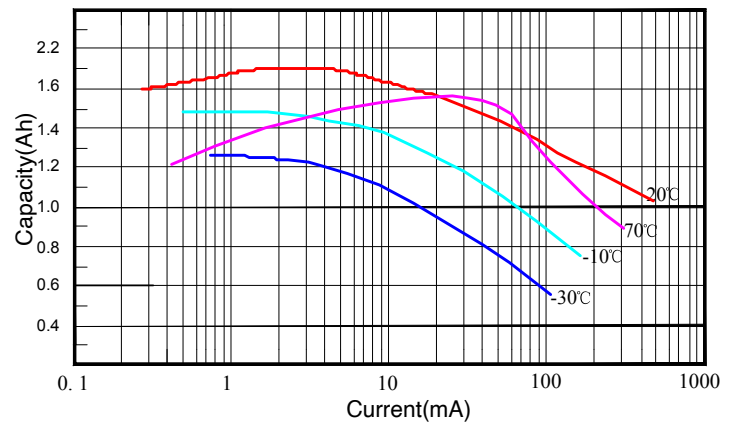

Storage

The storage area should be clean, Cool (not exceeding +30°C), dry And ventilated.

Warning

- Do not use if the battery casing was mangled.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C (212°F), incinerate or expose contents or water.
- Do not solder directly to the cell (use tabbed cell versions instead)

■ Voltage VS. Temperature

