


HSWE-26SMIR



Search Light HD SDI to **prevent Crime**

1/2.9 inch SONY CMOS / High Definition Serial Digital Interface /
HD SDI(1080P) / High Resolution (1000 TV Line OVER) /
Upgraded Waterproof Housing (IP68rating) / 0 Lux at IR On (IR LED N50 White 30 pcs) /
Smart IR / MDIR (Motion Detection IR) / WDR (Wide Dynamic Range) /
DNR (Digital Noise Reduction) / True Day & Night (ICR) Function / Privacy /
Easy Installation / 3Axis Concealed Bracket /
DC Auto IRIS & TDN Fixed Lens 4.3mm

HD SDI BULLET IR

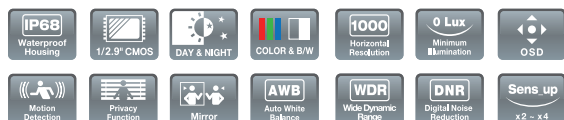

BULLET DIMENSIONS (mm)

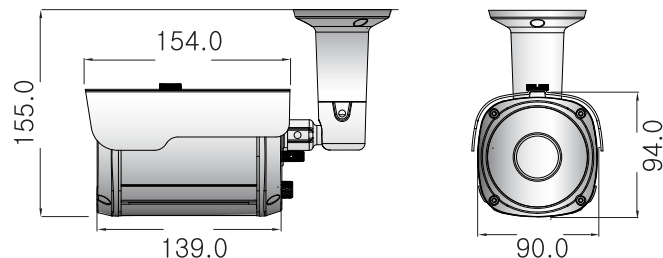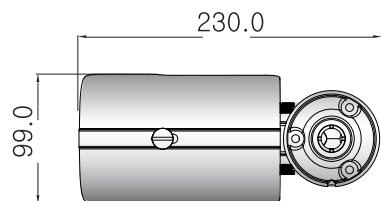

SPECIFICATION	HSWE-26SMIR
Resolution	HD-SDI (1080P, 720P) / 1000 TV LINE OVER
Sensor	1/3 INCH SONY CMOS
Total Pixels	2010(H) X 1108(V) = 2,227,080
Effective Pixels	1944(H) X 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC off)
Video Output	SMPTE292M (HD-SDI) / CVBS: 1.0Vp-p (75ohm): Option)
Min. Illumination	0 Lux at IR On
White Balance	AUTO / AUTO EXT / PUSHING / MANUAL
Electronic shutter speed	AUTO / Manual (1/30sec ~ 1/60,000sec)
Brightness	ADJUSTABLE (0 ~ 20 STEP)
SENS_UP	OFF / X2 / X3 / X4
DNR	OFF / LOW / MIDDLE / HI
WDR/BLC	OFF / WDR / BLC
HLM	OFF / SET
ACE	OFF / ON
Day & Night	AUTO (Day <--> Night TIME Change) , COLOR , B/W, EXTERN, MDIR
Smart IR	OFF / ON
Privacy	OFF / ON (31 Zone)
Motion Detection	OFF / ON
D.ZOOM	0 ~ X127
FLIP	OFF / ON
FREEZE	OFF / ON
Image Conversion	OFF / ON
Language	ENGLISH
Sharpness	ADJUSTABLE (0 ~ 10 STEP)
COMM.	RS-485 (PELCO-D)
Operating Temperature/Humidity	-20°C~+50°C / 30%~80% RH
Storage Temperature/Humidity	-30°C~+60°C / 20%~90% RH
Power	DC12V
Signal	The distant difference is occurred according to cable option and other circumstances. (based on RG59: 100M)