


INVR-16L6O08H2

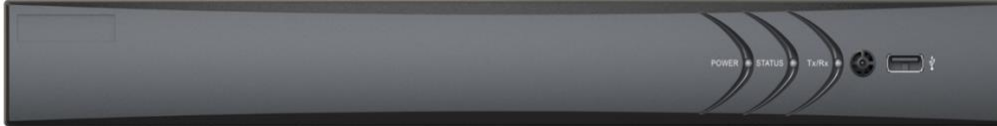

Features and Functions

Professional and Reliable

- | Dual-OS design to ensure high reliability of system running
- | ANR technology to enhance the storage reliability when the network is disconnected

HD Input

- | H.265+/H.265/H.264+/H.264 video formats
- | Connectable to the third-party network cameras
- | Up to 32 IP cameras can be connected
- | Recording at up to 8 MP resolution
- | Supports live view, storage, and playback of the connected camera at up to 8 MP resolution

HD Output

- | HDMI and VGA independent outputs provided
- | HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- | Up to 2 SATA interfaces connectable for recording and backup
- | Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format

HD Transmission

- | 1 self-adaptive 10/100/1000 Mbps network interface
- | 16 independent PoE network interfaces are provided

Various Applications

- | Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- | Connectable to smart IP cameras and the recording, playing back, and backing up of VCA alarms can be realized
- | VCA detection alarm is supported
- | Instant playback for assigned channel during multi-channel display mode
- | Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- | Supports HDD quota and group modes; different capacity can be assigned to different channels
- | CTR-MAZi for easy network management

Video/Audio input	
IP video input	16-ch
Incoming bandwidth	160 Mbps
Outgoing bandwidth	160 Mbps
Video and Audio output	
HDMI output resolution	4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
VGA output resolution	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Audio output	1-ch, RCA (Linear, 1 kΩ)
Decoding	
Decoding format	H.265+/H.265/H.264+/H.264/MPEG4
Live view/Playback resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Synchronous playback	16-ch
Capability	2-ch @8 MP (25fps)/4-ch @4 MP (30fps)/8-ch @1080p (30fps)
Network management	
Network protocols	TCP/IP, DHCP, CTR-MAZi, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
Hard disk	
SATA	2 SATA interfaces
Capacity	Up to 6 TB capacity for each disk
External interface	
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
USB interface	<i>Front panel:</i> 1 × USB 2.0; <i>Rear panel:</i> 1 × USB 3.0
PoE interface	
Interface	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Standard	IEEE 802.3 af/at
General	
Power supply	100 ÷ 240 Vac, 50 ÷ 60 Hz, 2 A
Power	≤ 280 W
Consumption (without hard disk)	≤ 15 W
Working temperature	-10 °C ÷ +55 °C (+14 ÷ +131° F)



Working humidity	10% ÷ 90%
Chassis	385 mm chassis
Dimensions (W x D x H)	385 x 315 x 52 mm (15.2"x 12.4" x 2.0")
Weight (without hard disk)	≤ 3 kg (6.6 lb)