

AVD-71SMIR

ANALOGUE DOME OUTDOOR IR




KEY FEATURES

- Compact design
- 700TVL Resolution
- IR cut filter with auto switch
- Min. illumination: 0.1 Lux @ F2.5 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Smart IR mode
- Internal Synchronization
- Advanced Engineering Design, High Reliability
- Ingress Protection: IP66



SPECIFICATION	AVD-71SMIR
Camera	
Image Sensor	1/3" CMOS
Signal System	PAL/NTSC
Effective Pixels	976 (H) × 496 (V)
Min. illumination	0.1 Lux @ (F2.5, AGC ON), 0 Lux with IR
Shutter speed	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s
Lens	2.8mm (3.6mm, 6mm optional) Angle of view: 88.26°
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°; Tilt: 0 - 75°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	700 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/ Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC ± 10%
Power Consumption	Max. 1.8W (Max. 4W with IR cut filter on)
Ingress Protection	IP66
IR Range	Approx. 10 to 20 meters
Dimensions	Φ89.5 × 69.8 mm (Φ3.52" × 2.75")
Weight	260 g (0.57 lbs)

DIMENSIONS (mm)

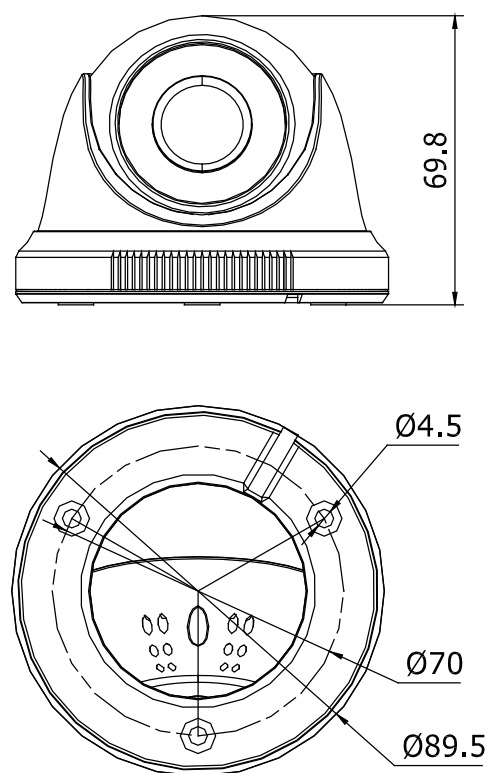

ACCESSORIES



Indoor/outdoor
wall mount



Indoor/outdoor
wall mount